



HyperTransport Cave



PRODUCT BRIEF

Overview Features

High-Speed
Low-Latency
Point-to-Point Link


HyperTransport technology is a high-speed, low-latency, point-to-point link for interconnecting integrated circuits (ICs) on a board. It is a packet-based link implemented on two independent unidirectional sets of wires. HyperTransport Cave is an endpoint device in the HyperTransport chain.

GDA's HyperTransport Cave core is designed for reuse and its flexible backend interface makes it easy to be integrated into wide range of applications. The core provides highly scalable bandwidth through programmable link widths and frequencies.

HyperTransport Cave core meets today's demand for the increased bandwidth and offers more bandwidth than any existing solutions. The core could be run 24 times faster than a 32 bit, 33 MHz PCI bus. The core interface is designed to operate at up to 1200 MHz DDR, yielding an effective transfer rate of 2.4 Gbits per second per wire pair. The design targets networking, telecommunications, embedded systems and any application where high speed, low latency response, low pin counts and scalability are necessary.

GDA's HyperTransport Cave solution leverages years of experience in PCI, PCI-X, and PCI Express technologies and the expertise in creating system validated IP solutions with RTL, synthesis, simulation, board and software elements to offer lowest risk in terms of compliance and interoperability. GDA is a leading IP provider for high-speed interconnect technologies, with several licenses sold in compute, storage and networking markets.

- Compliant with HyperTransport I/O Link Specification, Rev. 1.1
- Can be hardware configured for 16-bit or 8-bit link interface
- Supports software programmable link widths of 16, 8, 4, or 2 bits
- Supports 1200, 1000, 800, 600, 500, 400, or 200 MHz link frequency
- Maximum aggregate bandwidth is 9.6 GB/sec
- Optional transaction interface provides target and initiator interfaces
- Supports direct peer-to-peer traffic
- Supports greater concurrency using unitID clumping
- Supports up to 16 streaming virtual channels
- Supports error handling through retry mechanism
- Supports 64 bit addressing
- Backward compatible with all previous versions of HyperTransport
- Supports link disconnect protocol
- Supports interrupt
- Supports external and internal loop backs

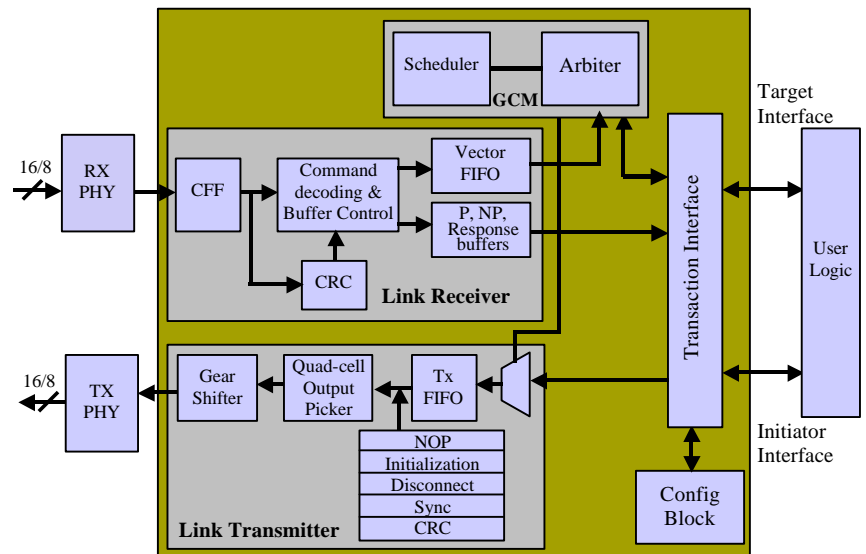

GDA Technologies, Inc.
accelerate your innovation™



HyperTransport Cave

Availability : April 2004
Language : Verilog HDL
Synthesis : Design Compiler
Simulation : Verilog-XL/NC, VCS
Technology : 0.13u Standard Cell

Visit : www.gdatech.com
Call : 408.432.3090
Fax : 408.432.3091
Email : ip@gdatech.com
Write : GDA Technologies
1010 Rincon Cir
San Jose, CA 95131

GDA Technologies reserves the right to change this document without prior notice and disclaim all warranties. It is the recipient's duty to confirm with GDA Technologies' Engineering Department specifications before proceeding with a product design.

GDA Technologies, HyperTransport Core and the GDA Technologies logo are trademarks of GDA Technologies, Inc. Patents and Patents pending.

©2004 GDA Technologies, Inc. San Jose, CA. All rights reserved.

January 2004 Version 1.0

Specifications

Configurable Options

- Link Widths: 16/8 bits
- Data path widths: 64/128
- Back-end interface can be configured to transaction interface
- Transaction interface can be configured to support target interface only
- Configurable buffer size for each virtual channel

Design Attributes

- Highly modular design
- Fully synchronous, technology-independent design
- 128-bit wide internal data path
- Most part of the Cave logic operates at 200 MHz core clock or more
- Clearly demarked clock domains
- Active-low asynchronous reset

Product Package

- RTL code
- Detailed design document
- Verification environment
- Test cases
- Synthesis environment/scripts

Documentation

- Design Guide
- Verification guide
- Synthesis guide

